

TECHNICAL BULLETIN



19 Motivation Dve, Wangara, WA, 6065 AUSTRALIA
T +61 8 9302 4000 | FREE 1800 999 196 | F +61 8 9302 5000

HR TREAT

(HOOK AND ROLLER LUBRICANT)

MATERIAL & FUNCTION

HR TREAT is a multi-purpose product designed as a dewatering oil, rust preventative and lubricant for hooks, rollers and overhead rails in abattoirs and other meat establishments.

FEATURES

Effectively lubricates hooks, rollers and rails. Protects against rusting. Does not build up or form hard surface coatings and is easy to clean and maintain.

APPEARANCE

Pale brown liquid.

APPLICATION

Hooks and Rollers: Add **HR TREAT** neat. Apply by brush, swab or rinse-bath application.

For rinse-bath application the watery layer at the bottom should be drained off as soon as practicable.

Overhead rails: Apply neat by brush or swab. For best results the rails should be cleaned with an appropriate cleaner and rinsed down with water prior to application.

PERFORMANCE CHARACTERISTICS

This product is suitable for use in the food industry as a Lubricant Type B (ie, a lubricant involving only incidental contact with food product).

TYPICAL ANALYSIS

Density @ 15°C 0.94

Flash Point COC °C >200

PACKAGING


200 Litre plastic drum.

IMPORTANT NOTICE TO CUSTOMER

*Since the use of this product is beyond the control of either seller or manufacturer, their only obligation shall be to replace any quantity of product, which is proven defective. They cannot assume any risk or liability in excess of the purchase price of the product itself, which does not include labour or any consequential damages resulting from the use of this product. Determining the suitability of this product for any intended use shall be solely the responsibility of the user. **ALWAYS TEST FIRST.***

Technical Bulletin for the application of

HR TREAT to meat hooks in
Abattoirs and Butchers

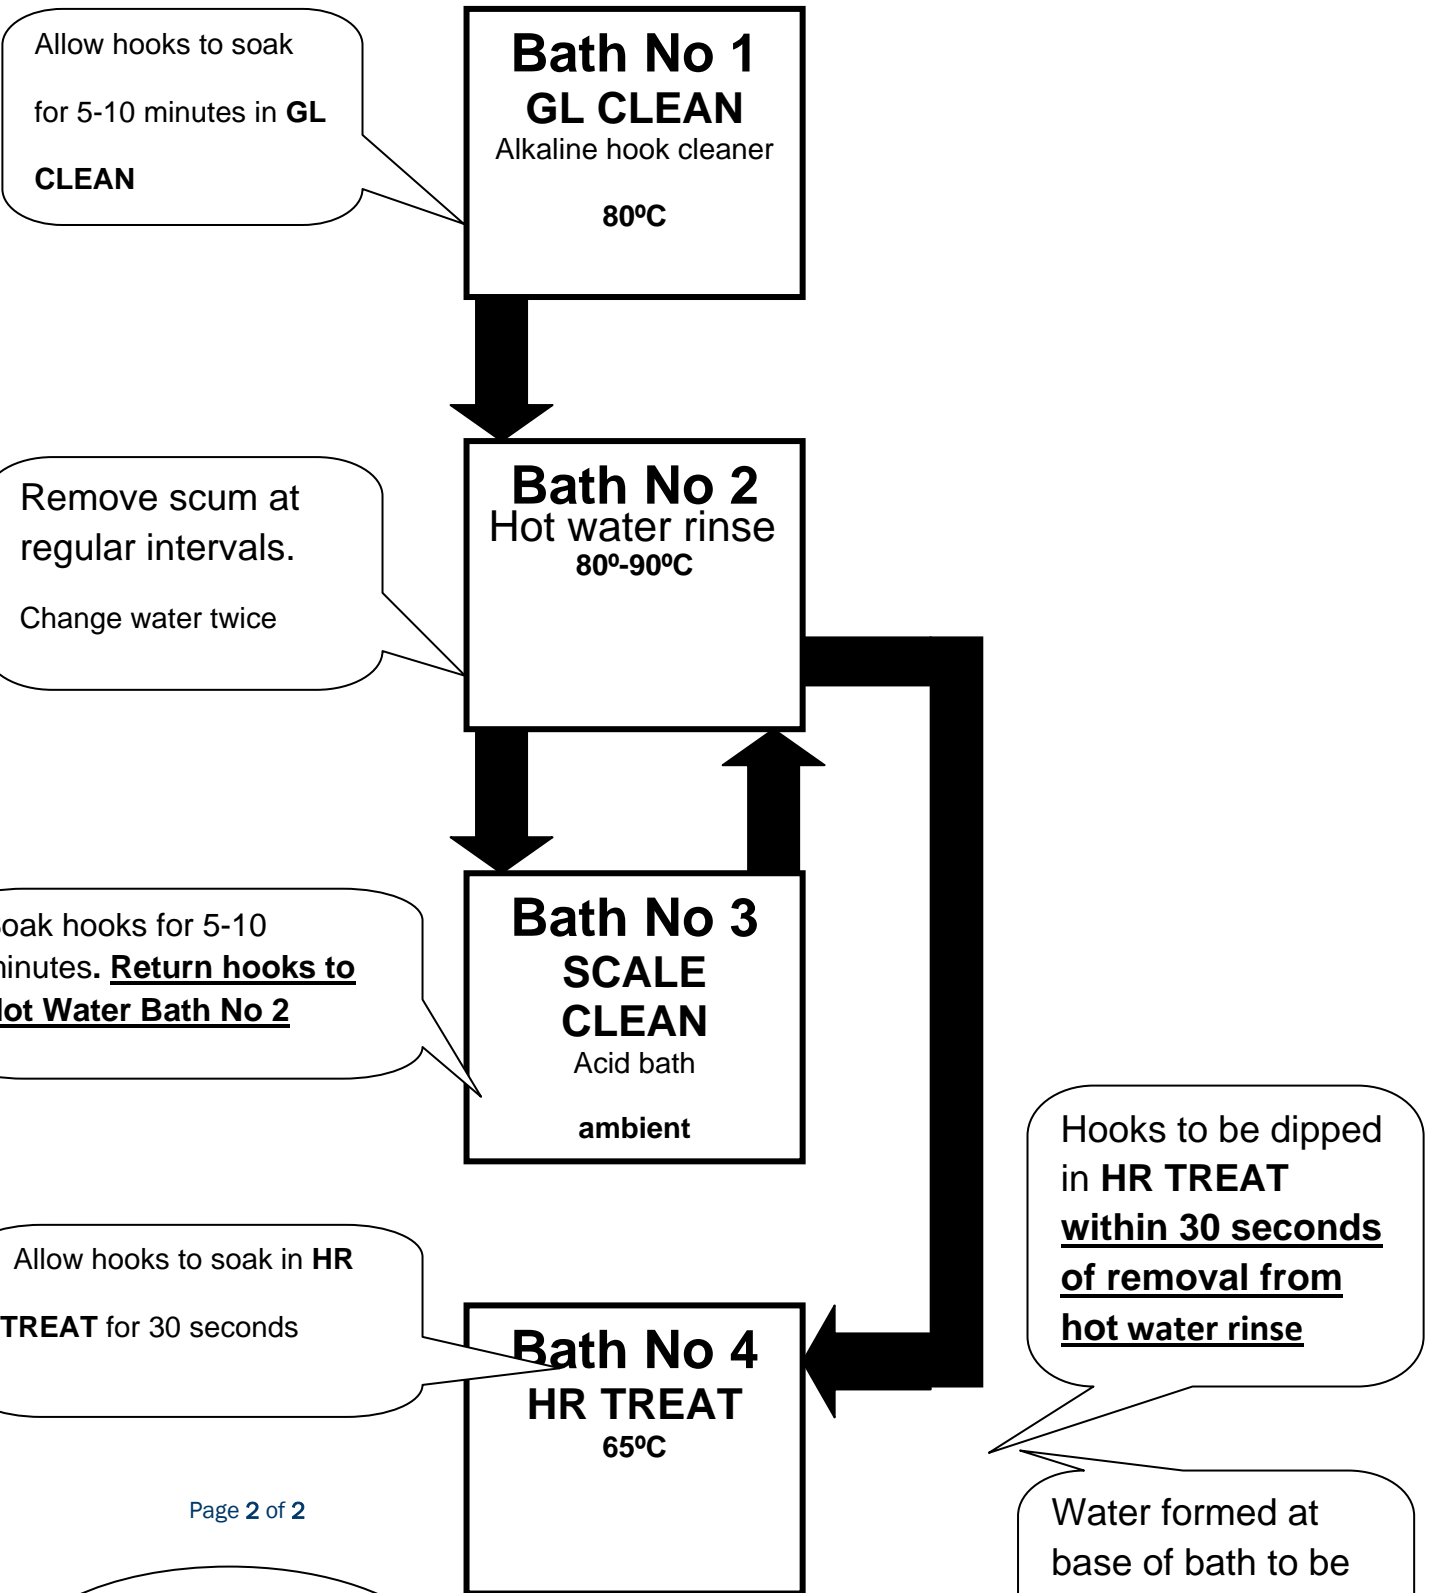

Rollers & Pins may require lubricating with White Oil BP